## Single TF DBC SST

35.7" x 19.2" x 12.1" (90.7cm x 48.8cm x 30.7cm)



Servers and airpots sold separately

- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- SplashGard® funnel and optional funnel locks help improve safety
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®

Agency:

Faucet: Lower

CE EHE

**Additional Features** 

BrewWISE

#### **Specifications**

**Product #:** 34800.0012

Water Access: Plumbed

Interface: Wireless Finish: Stainless

Funnel: Smart Funnel

#### **Electrical & Capacity**

| Volts   | Amps      | Amps Watts | Cord<br>Attached | Plug Type | 8oz cups/hr<br>236ml cups/hr | Input H <sup>2</sup> O<br>Temp. | Phase | # Wires<br>plus Ground | Hertz |
|---------|-----------|------------|------------------|-----------|------------------------------|---------------------------------|-------|------------------------|-------|
| 220-240 | 14.5-15.7 | 3180-3780  | Yes              | EURO 16A  | 171                          | 60°F (15.5°C)                   | 1     | 2                      | 50/60 |

#### Plumbing Requirements

| PSI   | kPa Fitting Supplied |                         | Water Flow Required (GPM) |  |  |  |  |  |
|-------|----------------------|-------------------------|---------------------------|--|--|--|--|--|
| 20-90 | 138-621              | 3/8" Male Flare Fitting | -                         |  |  |  |  |  |

#### **CAD Drawings**


| 2D | Revit | KLC |
|----|-------|-----|
| •  |       |     |


Created on:

03/10/2016



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

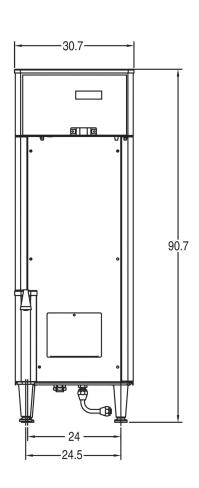

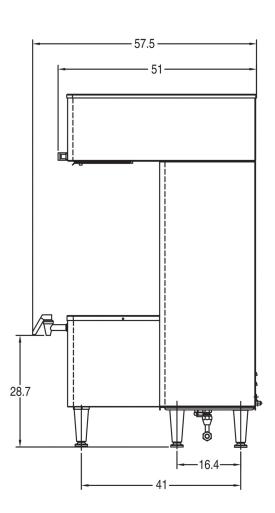

| Unit    |          |          |          | Shipping |        |       |            |                       |
|---------|----------|----------|----------|----------|--------|-------|------------|-----------------------|
|         | Width    | Height   | Depth    | Width    | Height | Depth | Weight     | Volume                |
| English | 12.1 in. | 35.7 in. | 19.2 in. | -        | -      | -     | 60.157 lbs | 8.131 ft <sup>3</sup> |
| Metric  | 30.7 cm  | 90.7 cm  | 48.8 cm  | -        | -      | -     | 27.287 kgs | 0.230 m³              |




### Related Products & Accessories: Single TF DBC SST(34800.0012)













# Serving & Holding Options: Single TF DBC SST(34800.0012)



TF SERVER, DSG2 1G/3.8L

Product #:42700.0000



TF SERVER, DSG2 1G/3.8L BLK

Product #:42700.0001



TF SERVER, DSG2 1G

Product #:42700.0003



TF SERVER, DSG2 1G BLK CD

Product #:42700.0004



TF SERVER, DSG2 1.5G

Product #:42750.0000



TF SERVER, DSG2 1.5G

Product #:42750.0001



TF SERVER, DSG2 1.5G

Product #:42750.0003



TF SERVER, DSG2 1.5G BLK CD

Product #:42750.0010



TF SERVER, 1G/3.8L MECH

Product #:44000.0000



TF SERVER, 1G/3.8L MECH BLK

Product #:44000.0001



TF SERVER, 1.5G/5.7L MECH

Product #:44050.0000



TF SERVER, 1.5G/5.7L MECH BLK

Product #:44050.0001

